


BALL MILL

Designed by F.C. bond for use by cement companies and quality control laboratories throughout the world. Can be used in calculating the grindability of all ore. The digital counter indicates the countdown and it shuts off the direct drive gear motor. Operator attention during this time is not required. A jogging button is provided to position the drum for loading and unloading. A manual jog is possible for precise positioning.

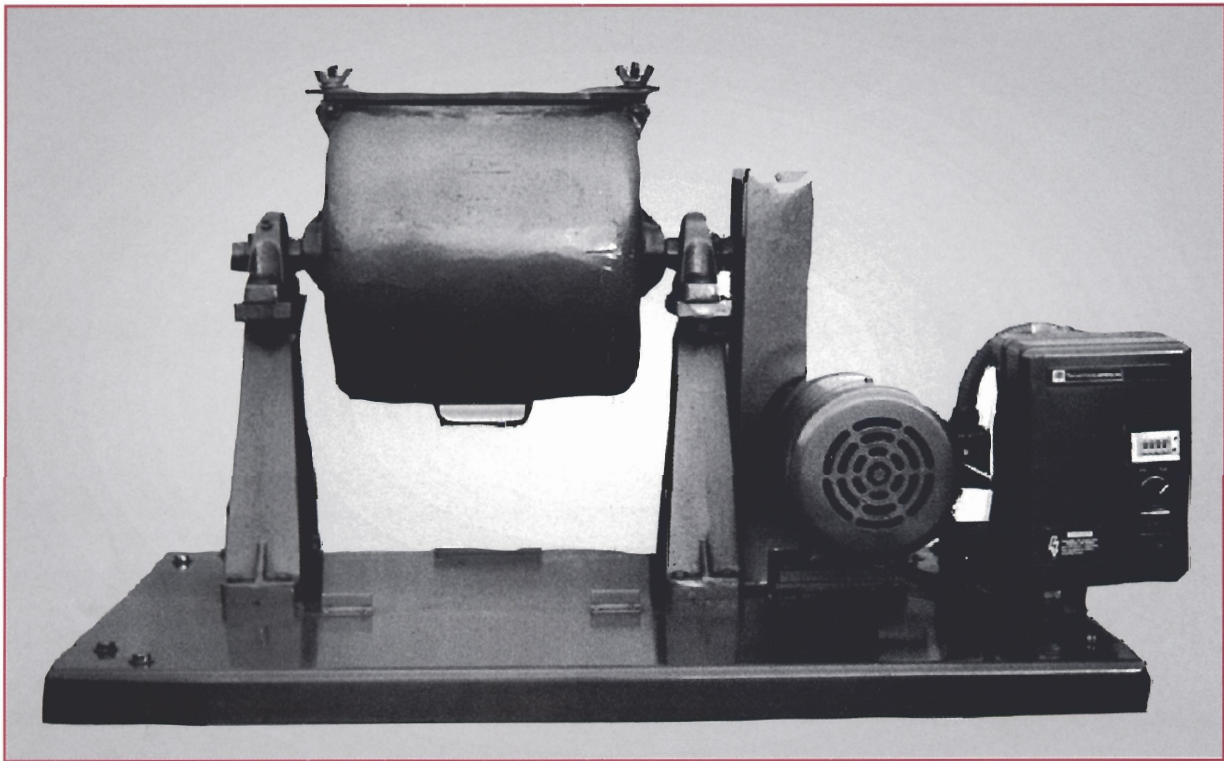

Standard Features

- All ball mills come standard with one 44.5 lb. charge of iron balls, iron stand, receiving pan and hand screen pan.
- 12" cast iron drum

Models

- Model 395-50
220 Volt, 3ph, 60 cycle
- Model 395-51
110/220, 1ph, 60 cycle
- Model 395-51X
110/220 v, 1ph, 50 cycle

